

ENROLLACABLES ABIERTOS IP55



Características de Producto

- Ligero y resistente, este enrollacables portátil abierto está diseñado para su uso en condiciones exigentes
- Manivela de fácil rebobinado
- Empuñadura de transporte bicolor ergonómica
- Guía de cable integrada
- Dispone de desconexión térmica
- 3 Tomas schuko IP55 para mayor estanqueidad contra polvo y agua
- **Cumple con las Normativas UNE-EN 60529 & ITC-BT-33**



CAT NO.	DESCRIPCIÓN	TIPO DE CABLE	LONGITUD DEL CABLE
OLE25167RN3IP55L-PX	16A abierto con 3 tomas IP55	3x1.5mm ²	25m
OXLE50167RN3IP55L-PX	16A abierto con 3 tomas IP55	3x1.5mm ²	50m
OXLE2516725RN3IP55L-PX	16A abierto con 3 tomas IP55	3x2.5mm ²	25m
OXLE4016725RN3IP55L-PX	16A abierto con 3 tomas IP55	3x2.5mm ²	40m

Dimensiones

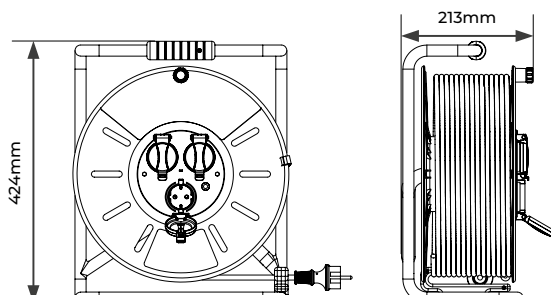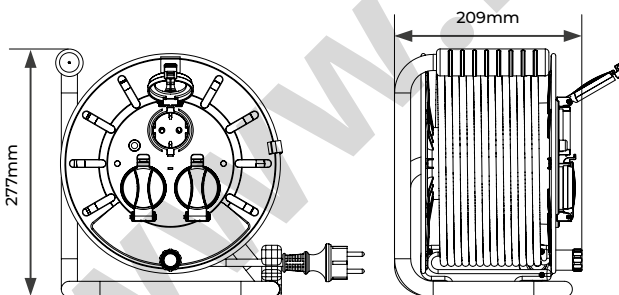

NORMATIVA

EN 61242:1997+A13:2017
EMC - 2014/30/EU
LVD - 2014/35/EU
UNE-EN 60529:218
ROHS - 2011/65/EU
WEEE - 2012/19/EU
ITC-BT-33

DESCRIPCION

Electrical accessories – Cable reels for household and similar purposes
EMC - Electromagnetic Compatibility
Low Voltage Directive
Degrees of protection provided by enclosures (IP Code)
RoHS - Restriction Of The Use Of Certain Hazardous Substances
WEEE - Waste Electrical And Electronic Equipment
Special purpose installations – Temporary and provisional installations for construction works

