




OT SERIES · OT系列

JUSEN超森门

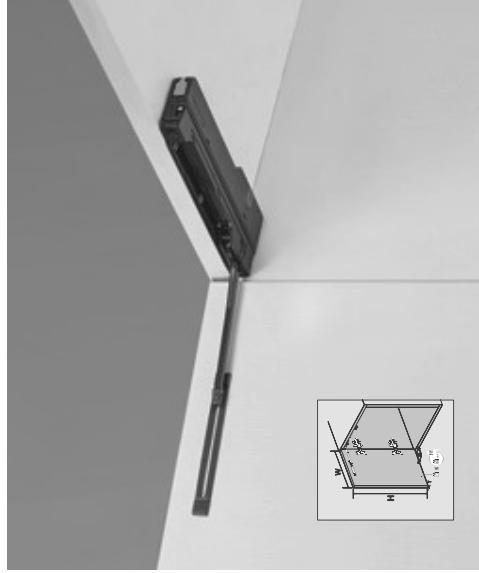


MOUNTING BRACKET INSTALLATION DATA 支架安装参数

| Compatible Hinge 搭配铰链 | L1 | L2 | L3 | S |
|-----------------------|----|-----|-----|------------|
| 全盖 Full Overlay | 32 | 101 | 170 | 12.5 |
| 半盖 Half Overlay | 41 | 110 | 179 | 12.5 |
| 内嵌 Inset | 50 | 119 | 188 | 12.5+TT+mm |

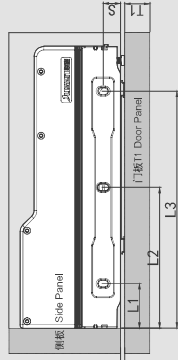

注: 1. T1为门框厚度, m为门板到底板距离;
2. 搭配铰链时, m ≥ 2mm, 搭配重型超重型时 m ≥ 3mm
3. 产品中安装卡铰链, 可使用安装卡铰链进行定位。

Note: 1. T1 is the thickness of the door panel and the side panel.
2. Door gap M ≥ 2mm when use light version, and door gap M ≥ 3mm when use heavy or ultra heavy version.
3. If the top of the door plate is flush with the top of the roof plate, h=0. If the door is higher than the top panel, h is positive; if the door is lower than the top panel, h is negative.



重要提醒: 安装 OT 前, 必须预先铰链安装好, 并调整到水平位置。
Important notice: The hinge must be installed and adjusted to a horizontal position before installation OT on door.

One touch OT自动开门器

TECHNICAL SPECIFICATION

产品描述

产品分类: 轻型、重型、超重型
适用范围: 轻型门: 7.5kg 以内
超重型门: 20kg 以内
超重型门: 25kg 以内
安装方式: 单独安装、门楣隐藏式安装
特殊功能: 全球专利专利产品, 实现开门一键 110°
缓冲全开, 一键缓冲自动闭合


Products for door: Light Heavy Ultra Heavy
Using Capacity: Light 7.5kg Heavy 20kg Ultra Heavy 25kg
Installation method: soon mounting installation and concealed type installation
Unique point: Push soft opening to max. angle 110° and soft close, Wire glass invention patents

Application 适用范围

| | Light version | Heavy version | Ultra heavy version |
|-----------|---------------|---------------|---------------------|
| | OT1-5L | OT1-5H | OT1-5E |
| 重量 Weight | ≤ 7.5kg | ≤ 20kg | ≤ 25kg |
| 高度 H | ≤ 700mm | ≤ 2200mm | ≤ 2800mm |
| 宽度 W | ≤ 600mm | ≤ 600mm | ≤ 600mm |
| 开门角度 | ≤ 110° | | |

CHUTE INSTALLATION DATA 滑槽安装参数

| L4 K值 | 16 | 17 | 18 | 19 | 20 |
|----------|----|----|----|----|----|
| 3 | 76 | 77 | 78 | 79 | 80 |
| 4 | 77 | 78 | 79 | 80 | 81 |
| 5 | 78 | 79 | 80 | 81 | 82 |

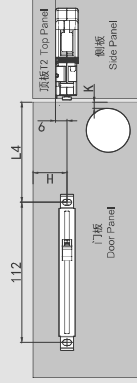

注: 1. HF12-9mm (T2为顶板厚度)
2. 以上表格为搭配全盖铰链参数, 如搭配半盖铰链, L4数值不变。
3. 如门板顶部与顶板顶部不平, 则h=0; 如果门板高于顶板, h为正值; 如果门板低于顶板, h为负值。
Installation parameter: value changes according to cover position and K value; refer to the table for details;
2. The table above shows the chute parameters when use the full overlay hinge, if use the half overlay hinge, the data should be reduce half, and the value of L4 remains unchanged.
3. If the top of the door plate is flush with the top of the roof plate, h=0. If the door is higher than the top panel, h is positive; if the door is lower than the top panel, h is negative

OT SERIES · OT系列

JUSEN超森门

ADAPTED DOOR SPECIFICATIONS OF OT SYSTEMS 适配门板规格

| Light 轻型 | Heavy 重型 | Ultra heavy 超重型 |
|--|--|--|
| <p>轻型: 7.5kg 以内 推荐门板规格: 700mmx600mm 以内 Light door: Max. loading ≤ 7.5kg Recommended door size: Max. HW ≤ 700x600mm</p> | <p>重型: 20kg 以内 推荐门板规格: 2200mmx600mm 以内 Light door: Max. loading ≤ 20kg Recommended door size: Max. HW ≤ 2200x600mm</p> | <p>超重型: 25kg 以内 推荐门板规格: 2800mmx600mm 以内 Ultra heavy: Max. loading ≤ 25kg Recommended door size: Max. HW ≤ 2800x600mm</p> |
| <p>全屋定制 Living room</p> | <p>衣柜 Wardrobe</p> | <p>橱柜 Book cabinet</p> |
| <p>客厅 Living room</p> | <p>衣帽间 Cloakroom</p> | <p>酒柜 Wine cabinet</p> |
| <p>餐厅 Dining room</p> | <p>书柜 Book cabinet</p> | <p>橱柜 Kitchen cabinet</p> |
| <p>榻榻米 Tatami</p> | <p>橱柜 Book cabinet</p> | <p>橱柜 Kitchen cabinet</p> |

技术要求:
1. 自动开门器所有版本安装参数一致;
2. 自动开门器版本可由前曲面颜色进行区分: 轻型: 橙色 / 重型: 黑色 / 超重型: 灰色
中国以外市场颜色以实际为准。

Technical requirements:
1. All versions of the OT have the same installation parameter.
2. Three versions OT can be identified by the back color of the mounting bracket (light version=grey, heavy version= black, ultra heavy=brown)
The lock color for markets outside of China are subject to actual conditions.